



Servers

Screamer I®

AEI's Screamer I servers are designed for high-performance enterprise level service. These servers come in floor standing tower configurations.

From **\$2335.00*** *Monitor not included. One year limited warranty. Ask for details.*



Fig 1: Screamer 1 Server Tower Model 1



Fig 2: Screamer 1 Server Tower Model 2

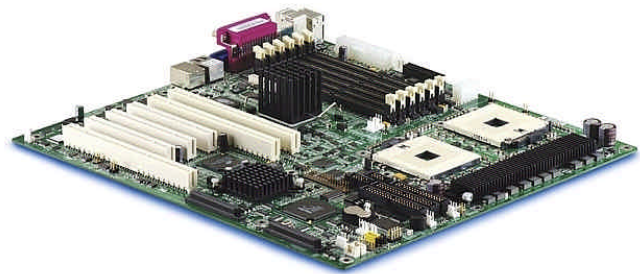


Figure 3: Intel SHG2

Screamer I® Configuration Options	
Motherboard	Intel SHG2 or similar
Processors	Intel Xeon with Hyper-threading
RAM	Up to 12 GB of registered ECC DDR200/266 SDRAM with six DIMM sockets
Hard Drive	IBM, 4x36GB, Dual channel Ultra 3 SCSI
RAID	RAID 0, 1, 5, Intel SRCU32 or Intel integrated ROMB (SHG2 and SCB2 motherboards only)
Networking	Minimum 1x100Gb, 1x1000GbFX standard
Graphics Controller	ATI Rage integrated
Power Supply	1 or 2 power supply option
Other	USB, ATA100, 6 PCI slots: 1x64-bit/133MHz PCI-X, 2x64-bit/100MHz PCI-X;3x32-bit/33MHz
Available OS	Windows NT/2000, Linux, Solaris, FreeBSD